

HT170W

HERGTE



Full Hydraulic System Automatic Transmission

WHEEL EXCAVATOR

PRODUCT HIGHLIGHTS

- Matching imported hydraulic system, high efficiency and fast response speed.
- Full-time four-wheel drive, with flexible escape ability, ensuring excellent off-road performance.
- Upgraded cabin, equipped with warm and cold air conditioning, air suspension seats.
- Equipped with Cummins engine, fuel-efficient and powerful.
- Double-balanced hydraulic suspension system.

Overall Weight | 14500kg
Bucket Capacity | 0.60m³
Rated Power | 132kW



山东帝盟重工机械有限公司

SHANDONG DIAMOND HEAVY INDUSTRY CO.,LTD

Telephone: 400-106-1996

International Trade: 86-534-7452888

E-mail: dm@sddmzg.com

Website: www.sddmzg.com

Address: National High-tech Industrial Development Zone, Yucheng City,
Dezhou City, Shandong Province, China.



HT170W

Full Hydraulic System Automatic Transmission

WHEEL EXCAVATOR

HERGTE



Technical Parameters

HT170W

Engine

Engine Type	Cummins QSB5.9-C180
Power	132kW/2200rpm

Working Range


Max.Digging Radius	8060mm
Max.Unloading Height	6300mm

Weight

Overall Weight	14500kg
----------------	---------

Bucket

Bucket Capacity	0.60m ³
-----------------	--------------------

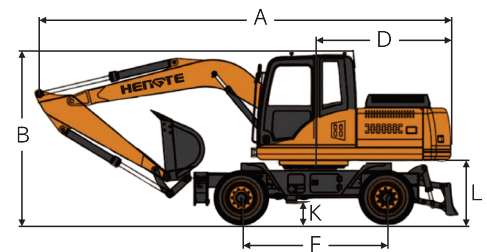

Overall Dimension

HT170W

Describe	Unit	Value
A. Shipping Length	mm	7900
B. Total Height During Transportation	mm	3355
C. Overall Width	mm	2580
D. Tail Turning Radius	mm	2395
E. Track Width	mm	1900
F. Wheelbase	mm	2645
G. Boom Length	mm	4600
H. Stick Length	mm	2200
I. Bulldozer Size	mm	2500*640
J. Bulldozer Lifting/Support Height	mm	450/110
K. Minimum Ground Clearance	mm	350
L. Ground Clearance of Counterweight	mm	1200



Working Range and Digging Force

HT170W

Describe	Unit	Value
a. Maximum Digging Radius	mm	8060
b. Maximum Digging Height	mm	8720
c. Maximum Digging Depth	mm	4865
d. Maximum Unloading Height	mm	6300
e. Minimum Turning Radius	mm	2395
f. Bucket Capacity	m ³	0.60
g. Hydraulic System Pressure	MPa	32
h. Hydraulic System Flow Rate	L/min	2*160
i. Bucket Digging Force	kN	85
j. Stick Digging Force	kN	53
k. Fuel Tank Capacity	L	280
l. Hydraulic Oil Tank Capacity	L	180
m. Gradient	%	≥70
n. Rotation Speed	r/min	11.5
o. Travel Speed	km/h	37

